



**INNOVATIVE SAFE
FOR CERTIFIED
GRADE III BURGLARY
PROTECTION – MEETS
POLICE APPROVED
STANDARDS**



PROGUARD

BURGLARY-RESISTANT PROTECTION



KEY FEATURES


- Burglary protection in accordance with the European standard, EN 1143-1, as certified by ECB•S for Grade III
- ProGuard's special barrier material provides certified burglary protection whilst also keeping the total weight of the safe down. Less weight means greater installation options
- The three-way boltwork is constructed with solid steel bolts
- ProGuard has a modern design with an ergonomic soft-touch handle
- Attractive dark grey (RAL 7016) appearance
- For additional security, ProGuard is fitted with an active relocker and anti-drilling plates have been incorporated into the boltwork to withstand burglary attempts
- A Class B key lock or a Class B high security electronic lock, approved in accordance with EN 1300, are both available as primary lock options. Grade III models must have a minimum of 1 x Class B lock fitted as standard
- Every model can be customised with a range of internal fittings to maximise storage capacity

PROGUARD

PRODUCT SPECIFICATIONS

| Model | External height (mm) | External width* (mm) | External depth**(mm) | Internal height (mm) | Internal width*** (mm) | Internal depth (mm) | Volume (litres) | Weight (kg) |
|-------|----------------------|----------------------|----------------------|----------------------|------------------------|---------------------|-----------------|-------------|
| 60 | 530 | 500 | 521 | 440 | 410 | 359 | 65 | 208 |
| 110 | 690 | 600 | 561 | 600 | 510 | 396 | 121 | 320 |
| 150 | 875 | 600 | 561 | 785 | 510 | 396 | 159 | 386 |
| 200 | 1150 | 600 | 561 | 1060 | 510 | 396 | 214 | 481 |
| 300 | 1600 | 600 | 561 | 1510 | 510 | 396 | 305 | 636 |
| 350 | 1600 | 675 | 585 | 1510 | 585 | 420 | 371 | 701 |
| 450 | 1850 | 675 | 616 | 1760 | 585 | 450 | 463 | 827 |

Projection of hinge *(20mm) and handle **(65mm) not included. *** Width excluding shelf racking strips. Racking reduces the internal width by 15mm.

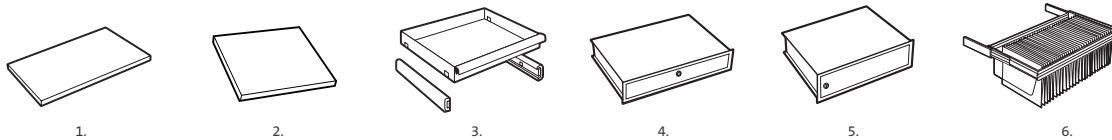

INTERNAL FITTINGS

1. Shelf - 20mm high - all sizes - max capacity 60kg
2. Reinforced shelf - 20mm high - all sizes - max capacity 120kg
3. Extendable shelf - 37mm high - sizes 110-450
4. Full width drawer - 100mm high - sizes 110-450
5. Lockable cupboard - 335mm high - sizes 110-450
6. Pull out file frame - 37mm high - sizes 110-450

LOCK OPTIONS

As the primary locking option, ProGuard safes can be fitted with either a high-security electronic lock or a key lock. For Grade III models, at least one EN 1300 Class B lock must be fitted as standard.

All locks are tested by ECB•S and are certified in accordance with the EN 1300 standard.

IMPROVED CAPACITY

Innovations made with the Grade III models have allowed the thickness of the safe walls to be reduced. This means that a safe with a higher level of protection will also offer greater capacity for the storing of valuable items.

BURGLARY TESTING



ProGuard has been approved by ECB•S in accordance with the European standard, EN 1143-1, for burglary protection in Grade III.

A range of attack tools were used to test ProGuard's level of resistance, from basic tools to sophisticated thermal and electrical equipment.



Approved by the Association of Insurance Surveyors

ACCREDITED BY SECURED BY DESIGN



Secured by Design is the only way for products to achieve police accreditation in the UK.

In order to achieve Secured by Design status the ProGuard range of safes had to adhere to rigorous test standards required by the police.

Authorised dealer

www.chubbsafes.co.uk